

The Solo High Volume Foaming Sprayer is designed to provide the increased dwell time many chemicals require to work effectively, even those sprayed on vertical surfaces! The operator controls the level of foaming by adjusting the amount of foaming agent added to the chemical used. The foam generated may range from slightly bubbly to a "dry" shaving cream consistency.

Uses

- ◆ **Pest Control** - two wall void accessories are available that allow the application of foam behind walls for safe, clean application to fight termites and other hidden pests.
- ◆ **Cleaning** - a variety of chemicals are much more effective if they are given sufficient dwell time. Application as a foam allows these chemicals the time needed to perform more effectively.
- ◆ **Mold Remediation** - Mold, like pests, flourishes behind walls. Foaming is an excellent way to get at the problem without tearing down or damaging walls.
- ◆ **Landscaping** - Ideal for spot treating weeds, while virtually eliminating the potential for damage caused by the spray drift generated while using herbicides. Foaming also lets crews identify where chemicals have been previously applied.

solo®

High Volume Foaming Sprayer



Features

- ◆ **Large Capacity Foaming Sprayer:** 2.25 gallon liquid capacity.
- ◆ **Heavy-Duty Tank:** The 456-F employ the extra sturdy Solo 450 series polyethylene tank for maximum durability. The tank is translucent to better monitor chemical levels.
- ◆ **4' Clear Hose:** The 4' hose, used in conjunction with the Flexible Wall Void Applicator, allows the user to inject foam at the tops of walls. It is clear so the user can monitor the flow of the foam.
- ◆ **Solo Deluxe Shut-Off Valve:** Multi-use valve allows quick change of wand assemblies for multi task efficiencies. The lock position reduces fatigue during continuous spraying.
- ◆ **Pressure Gauge:** Consistent pressure brings consistent results. The pressure gauge allows the user to monitor tank pressure so it can be kept within an acceptable range.
- ◆ **Accessories Available:** Two accessories are available to convert the foaming sprayer from a surface sprayer into a wall/crevice void foaming unit.



Flexible Wall Void Applicator

Simply drill a hole, insert the probe and direct the foam at the problem area.

Item # 49 00 643
UPC 720343456646




Foam Injector

This unit can be used to foam into crevices and voids between slabs and in walls.

Item # 49 00 644
UPC 720343456356

- ◆ **Conversion Kit Available:** This kit converts any Solo 450 series sprayer into a foaming sprayer.

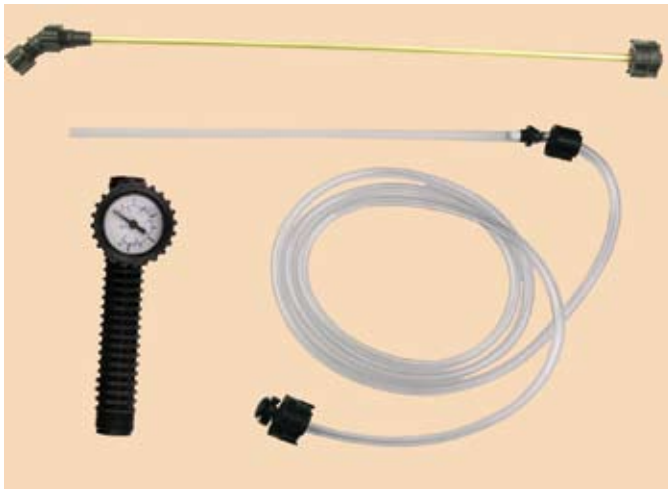

Foamer Conversion Kit

Everything you need to convert your 454, 456, or 457 sprayer into a high volume foam generator.

Item # 49 00 642
UPC 720343457957

| | |
|-----------------|------------------|
| Model # | 456-F |
| UPC # 720 343 | 456103 |
| Capacity | 2 Gal. |
| Wand | 28" |
| Hose | 48" |
| Pump | Piston |
| Cubic Feet | 1.09 |
| Weight | 6.25 lbs |
| Carton Size | 24" x 9" x 8.75" |
| Pallet Quantity | 75 |

5100 Chestnut Avenue
Newport News, VA 23605
www.solousa.com
Phone (757) 245-4228 Fax (757) 245-0800
Order Desk Phone (757) 245-5531

USLI250510